




LABORATORY SECTOR

SPECTROPHOTOMETER



Kalstein®

A different accompaniment, at your service

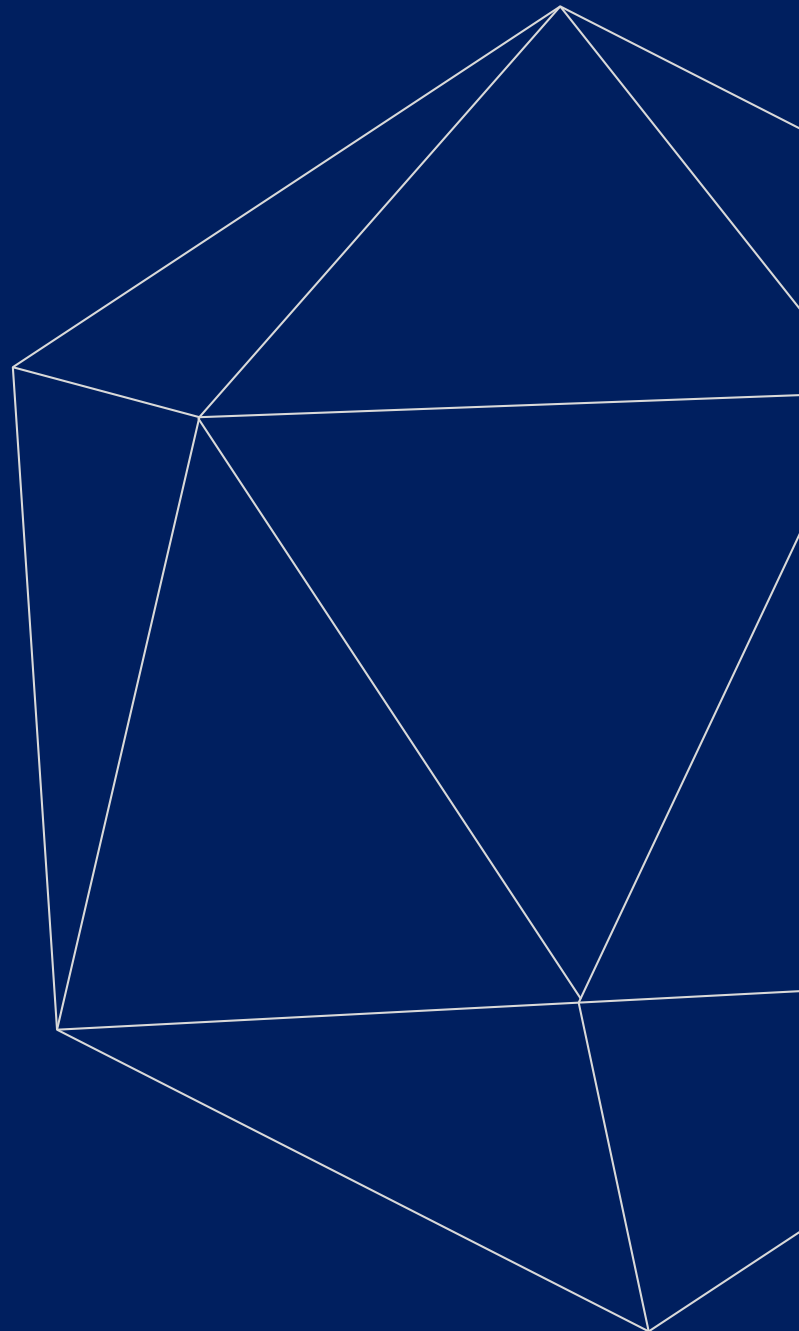



Kalstein®

A different accompaniment, at your service

OUR SERVICES

Benefits and Support

In Kalstein France, we take care of the full satisfaction of our customers, that is why we provide value-added services of the highest level based on our experience.



Online Inductions and Trainings

In any part of the world, receive your induction or training from our specialized team of engineers



Quick Response

Our work team is always available to response all your consults or questions, in order to support you in any situation.



#Letsgivemore

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



Technical Support

Enjoy of personalized advice for the correct preventive and corrective maintenance of your equipment, thanks to Kalstein's manuals and articles, special catalogues and video tutorials.



Delivery Logistics

We take care of all the necessary logistics for the dispatch of your goods, whether is by sea, land or air.



Kalstein Worldwide

With more than 25 years growing with our customers, Kalstein's multiformat and modern content, is now present in more than 10 countries and increasing.



KALSTEIN® Spectrophotometer
Grating Spectrophotometer
Model YR05494



#Letsgivemore ♥

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



All rights reserved © KALSTEIN France S. A. S.,
2 Rue Jean Lantier • 75001 Paris •
+33 1 78 95 87 89 / +33 6 80 76 07 10 •
<https://kalstein.eu>
KALSTEIN FRANCE, S. A. S




KALSTEIN® Spectrophotometer Grating Spectrophotometer Model YR05491 // YR05492



Product Description:

YR05494 spectrometer is equipped with ϕ 8mm, ϕ 4mm, 1x3mm three measuring apertures, more adaptability, accurate measurement of color, stable performance, in plastic electronics, paint coating, textile printing and dyeing, printing paper products, automotive, medical, cosmetics and food industries, in scientific research institutions, laboratory fields are widely used. YR05494 series grating spectrophotometer is Kalstein company spent 3 years, carefully designed, fully with independent intellectual property rights grating spectrophotometer. The instrument uses 1000 lines of precision shining grating as the optical splitter, built-in silicon photodiode array (double row 40 groups) sensor, imported white board, repeatability delta E* AB easily controlled within 0.03, the use of long life full spectrum LED as the light source, optical resolution in the visible range is less than 10nm. Under the condition of d/8 geometric optical illumination recommended by CIE, YR05494 grating spectrophotometer can accurately measure the SCI and SCE reflectance data of samples / fluorescent samples, and also can accurately measure and express various color difference formulas and color indexes in various color spaces. With spectrophotometer YR05494, it can easily realize the accurate transmission of color and can also be used as the detection equipment of accurate color matching system.

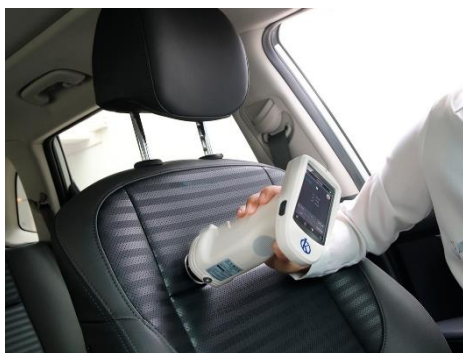

#Letsgivemore

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.

KALSTEIN® Spectrophotometer

Grating Spectrophotometer

Model YR05491 // YR05492



Technical Advantages:

- ✓ Silicon photodiode array (double 40 array) sensor The larger area of the double 40 array sensor, the strong light will not saturation, weak light sensitivity and a wider spectrum response range, to ensure the instrument measurement speed, accuracy, stability and consistency, master the core technology, and the international standard of the same platform, complete compatibility.
- ✓ Adopt full waveband balanced LED light source The full waveband balanced LED light source ensures sufficient spectral distribution in the visible light range, avoids the spectral loss of white LED in specific waveband, and ensures the measurement speed and accuracy of the measurement results.
- ✓ Grating spectroscopic technique Use Grating spectroscopic technique, with higher resolution, to make the color measurement more accurate.
- ✓ Place the base safely to ensure that the whiteboard is not dirty.
- ✓ Professional whiteboard, a lifetime never change color commitment
- ✓ Fast charging Special fast charging mode, low voltage to remind charging or use off-duty time charging, to ensure the capacity and life of the battery (note: frequent repeated battery charging more harm).
- ✓ New fashionable appearance design based on ergonomics The position of the hand holding and the measurement button are carefully designed to meet different holding habits, smooth and fine surface, resulting from the high-precision appearance processing art.
- ✓ Equipped with three measuring apertures to meet the most samples measurement The Factory configuration of spectrophotometer YR05494 is with \varnothing 8mm flat aperture, \varnothing 8mm tip aperture, \varnothing 4mm flat aperture, \varnothing 4mm tip aperture, \varnothing 1x3mm aperture, a total of five measuring apertures, to meet the most samples measurement.
- ✓ Camera positioning can clearly observe the measured area Spectrophotometer YR05494 built-in camera positioning, through the camera real-time view, can accurately determine whether the object measured part is the target center, improve the measurement efficiency and accuracy.
- ✓ Excellent errors between instruments and repeatability Ensure the consistency of measurement data of multiple equipment, to be used for color matching and accurate color transfer.
- ✓ A variety of color spaces and observation light sources Offer CIE LAB,XYZ,Yxy,LCh,CIE LUV, S-RGB,HunterLab, β XY,DIN Lab99 Mussel(C/2) color spaces, and D65, A, C, D50, D55, D75, F1, F2 (CWF), F3, F4 and F5, F6 and F7 (DLF), F8, F9, F10 (TPL5), and F11 (TL84), F12 (TL83 / U30) a variety of light sources, to meet the special measurement requirements under different measurement conditions.
- ✓ Adopt international common use d/8 SCI/SCE Synthesis technology Adopt D/8 (SCI/SCE) measurement structure to more objectively reflect the color itself, and reduce the impact of object surface texture on test results, in accordance with CIE No.15. GB/T 3978,GB 2893,GB/T 18833,ISO7724-1,ASTM E1164,DIN5033 Teil7.
- ✓ Dual optical path system for more accurate color measurement Dual optical path system, optical resolution is less than 10nm in the visible range, can simultaneously measure the sample SCI, SCE spectrum.
- ✓ PC software has powerful function expansion SQCX quality management software with YR05494 spectrophotometer is suitable for quality monitoring and color data management of various industries. Digitize user data color management.



#Letsgivemore 

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.

KALSTEIN® Spectrophotometer

Grating Spectrophotometer

Model YR05491 // YR05492



Technical Specification:

Model	YR05494
Optical Geometry	Reflect: di:8°, de:8°(diffused illumination, 8-degree viewing angle)
	SCI (specular component included)/SCE (specular component excluded) ;
	Include UV / excluded UV light source
	Conforms to CIE No.15,GB/T 3978,GB 2893,GB/T 18833,ISO7724-1,ASTM E1164,DIN5033 Teil7
Characteristic	double apertures for accurate color analysis and transmission in laboratory
	It is used for precise color measurement and quality control in plastic electronics,
	paint and ink, textile and garment printing and dyeing, printing, ceramics and other industries, and for fluorescent sample measurement.
Integrating Sphere Size	Φ40mm
Light Source	Combined full spectrum LED light source, UV light source
Spectrophotometric Mode	Flat Grating
Senso	Silicon photodiode array (double row 40 groups)
Wavelength Range	400~700nm
Wavelength Interval	10nm
Semiband Width	10nm
Measured Reflectance Range	0-200%
Measuring Aperture	MAV:Φ8mm/Φ10mm ; SAV:Φ4mm/Φ5mm
Specular Component	SCI&SCE
Color Space	CIE LAB,XYZ,Yxy,LCh,CIE LUV,s-RGB,HunterLab,βxy,DIN Lab99 Munsell
	(C/2)
Color Difference Formula	$\Delta E^*ab, \Delta E^*uv, \Delta E^*94, \Delta E^*cmc(2:1), \Delta E^*cmc(1:1), \Delta E^*00, \text{DIN} \Delta E99, \Delta E$
	(Hunter)
Other Colorimetric Index	WI(ASTM E313, CIE/ISO,AATCC,Hunter),
	YI(ASTM D1925, ASTM 313),
	Metamerism Index MI,
	Staining Fastness, Color Fastness, Color Strength, Opacity, 8° Glossiness,555 tone classification



#Letsgivingmore ♥

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.

KALSTEIN® Spectrophotometer
Grating Spectrophotometer
Model YR05491 // YR05492



Observer Angle	2°/10°
Illuminant	D65,A,C,D50,D55,D75,F1,F2(CWF),F3,F4,F5,F6,F7(DLF),F8,F9, F10(TPL5),F11(TL84),F12(TL83/U30)
Displayed Data	Spectrogram/Values, Samples Chromaticity Values, Color Difference Values/Graph, PASS/FAIL Result, Color Offset
Measuring Time	About 1.5s (Measure SCI & SCE about 3.2s)
Repeatability	Spectral reflectance: MAV/SCI, Standard deviation within 0.08% (400 nm to 700 nm: within 0.18%) Chromaticity value: MAV/SCI, within ΔE^*ab 0.02 (When a white calibration plate is measured 30 times at 5 second intervals after white calibration)
Inter-instrument Error	MAV/SCI, Within ΔE^*ab 0.15 (Average for 12 BCRA Series II color tiles)
Measurement Mode	Single Measurement, Average Measurement(2-99times)
Locating Method	Camera Locating, stabilizer cross position
Dimension	L*W*H=129X76X217mm
Weight	Approx 600g
Battery	Li-ion battery, 3.7v, 5000mAh, 6000 measurements within 8 hours
Illuminant Life Span	5 years, more than 3 million times measurements
Displayed Data	3.5-inch TFT color LCD, Capacitive Touch Screen
Data Port	USB, Bluetooth 4.2
Data Storage	Standard 1000 Pcs, Sample 30000 Pcs
Language	Simplified Chinese, English, traditional Chinese
Operating Environment	0~40°C, 0~85%RH (no condensing), Altitude < 2000m
Storage Environment	-20~50°C, 0~85%RH (no condensing)
Standard Accessory	Power Adapter, User Guide, PC Software(Download from office website), USB cable, White and Black Calibration Cavity, Protective Cover, Wrist strap, 8mm flat aperture, 8mm tip aperture, 4mm flat aperture, 4mm tip aperture
Optional Accessory	Micro Printer, Powder Test Box
Notes	The specifications are subject to change without notice.



#Letsgivingore

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



 **Kalstein**[®]
A different accompaniment, at your service

#LETSGIVEMORE 

**WITH THE
ACQUISITION
OF A KALSTEIN
EQUIPMENT**

YOU MAKE A CONTRIBUTION TO:



**Fundación
Jacinto Convit**

<https://www.jacintoconvit.org/>



<https://onetreepanted.org>



Humatem

Solidarité et coopération
biomédicale


<https://www.humatem.org/>



**MANIAPURE
FOUNDATION USA**

<https://www.maniapurefoundation.org/>

Articles Kalstein
(Social Networks and Official Websites)

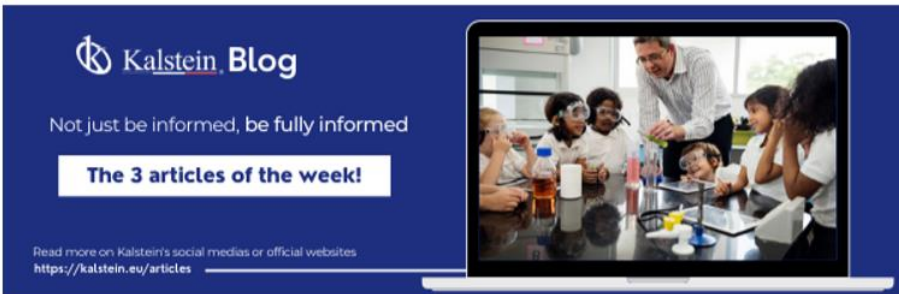

Kalstein Blog
Not just be informed, be fully informed

The 3 articles of the week!

Read more on Kalstein's social medias or official websites
<https://kalstein.eu/articles>



1
Read this ARTICLE NOW

How does the climate affect your microscope?

Kalstein Blog

Article of the week:
How does the climate affect your microscope?

Read more on Kalstein's social medias or official websites
<https://kalstein.eu/articles>



2
Read this ARTICLE NOW

What is the importance of the laboratory refrigerator?

Kalstein Blog

Article of the week:
What is the importance of the laboratory refrigerator?

Read more on Kalstein's social medias or official websites
<https://kalstein.eu/articles>

Kalstein Training Videos
(Youtube Channel and Official Websites)



Kalstein France - Jacinto Convit Foundation / Allianc...
23 views • 3 years ago



Kalstein's Microscopes
445 views • 1 week ago



PARIS - FRANCE
HEADQUARTER
2 Rue Jean Lantier
75001 Paris - France

Tlf: +33 (0) 01 78 95 87 89
Cel: +33 (0) 6 80 76 07 10
sales@kalstein.eu

<https://kalstein.eu/>
<https://www.kalstein.fr/>

